

The Exinda 6060

Unified Performance Management for Headquarters/Data Centers



The Exinda 6060

Designed for medium to headquarter offices and data centers, the 6060 model expands to support up to 1 Gbps worth of traffic and up to 10,000 users.

Built upon Exinda's new 64bit architecture, and featuring a multi queue network interface controller (NIC) combined with a multi threaded operating system (OS); this new model offers scalability and performance at a price that satisfies even the most cost-conscious buyers.

The Challenge

Everyday more and more data is being pushed across our networks. Increased growth and reliance of web based applications, VoIP, streaming video and Internet usage have congested our networks and made them unreliable. Network users are spending more and more time waiting at screen (TWAS) as applications compete for finite resources over stressed, over-run networks. This proliferation of traffic has degraded our networks' speed and performance and resulted in productivity losses.


The challenge faced by IT professionals today, is how to gain visibility into the network, identify what applications and users are causing the congestion and put policies in place to ensure applications and data run smoothly over your network, despite the ever-increasing demand?

The Solution

Exinda provide users with the best network experience possible by maximizing the speed and efficiency of applications over the network.

Exinda's unified performance management (UPM) solution brings together a suite of advanced, best-of-breed, visibility, traffic-shaping and WAN optimization technologies into a single, easy to-use appliance designed to improve network productivity.

Exinda is the only unified performance management solution on the market. Controlled through a seamlessly integrated, unified management console, Exinda reduces costs, increases revenue and allows you to get the most out of your network.

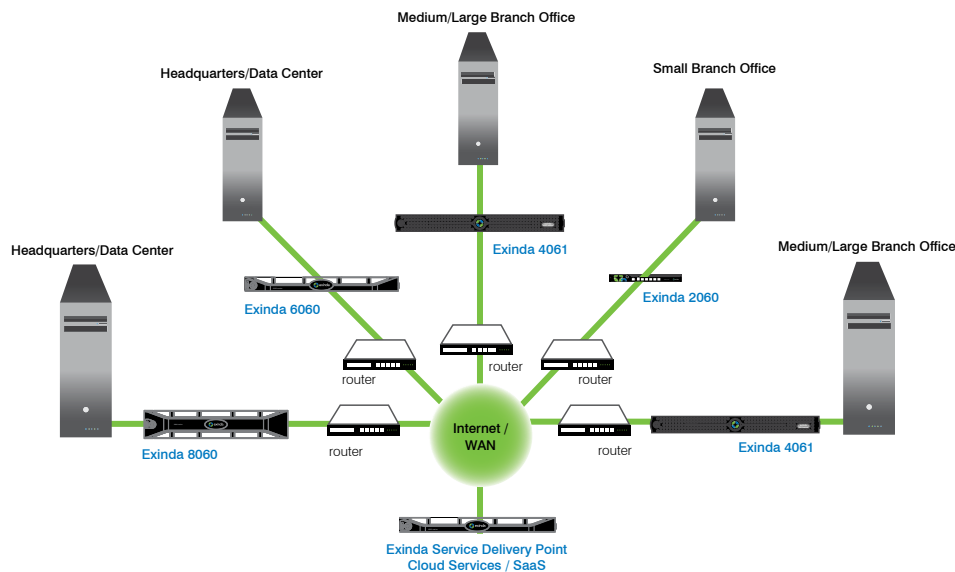

Features & Benefits

Visibility

Provides insight into network activity, usage and performance. Gives you the information you need to keep your network operating at peak performance

- Layer 7 Classification
- Heuristic Classification
- URL Classification
- Drill Down Capabilities
- Real Time Monitoring
- Top Talkers/Top Conversations
- Active Directory User ID
- Anonymous Proxy Detection
- Application Response Time
- Service Level Agreements
- Citrix Published Applications
- Automated PDF Reporting

Control

Maximize network resources to the needs of your organization through comprehensive control over network traffic without placing heavy-handed restrictions on users.

- QoS / Dynamic per IP User
- Bandwidth Management
- Traffic-shaping
- Prioritization
- Active Directory Integration

Optimization

Rapidly, turn understanding into action that drives network performance, improves the user experience, and optimizes productivity.

- Layer 4 TCP Optimization
- Layer 7 Application Acceleration
- Universal Caching
- Compression
- Intelligent Acceleration
- Peer Auto-Discovery



Exinda 6060 Hardware Specifications

Form Factor	19" 1U rack mount
Dimensions	434 x 43 x 627 mm, 17.09" x 1.69" x 24.69"
Weight	11.8 kg / 31 lb
CPU	Intel® Xeon® E5504, 2.00GHz/4M,4C 80W
RAM	6GB Memory (3x2GB), 1333MHz Dual Ranked UDIMMs
HDD	500GB 7.2K RPM SATA 3.5"
Data Store / Cache Size	385GB
NICs (default)	2 x 10/100/1000 copper (onboard) + 2 x 10/100/1000 copper bypass (slot 1)
NICs (expandable to)	2 x 10/100/1000 copper (onboard) + 6 x 10/100/1000/10000 copper/fiber
Bridges/Bypass Pairs (default)	1
Bridges/Bypass Pairs (expandable to)	3
Interface NIC Slots	1
Console	RS-232 male DB-9
Power Supply Type	Dual Internal, Hotswap
Power Rating	Dual power supply (500W) - Redundant Auto Ranging (100V~240V)
Environment	0-40C, storage temp 20-80C relative humidity 0-90% (non-condensing)
Approvals	CE,FCC, Certified/RoHS

Software Specifications

Licensed Bandwidth (full duplex)	x700 Software Visibility & Control					x800 Software Visibility, Control & Optimization			
	45	100	250	500	1G	10	20	45	
Max. Device Throughput (Mbps)	10,000	10,000	10,000	10,000	10,000	10,000	10,000	10,000	
Max. Concurrent Flows	512,000	512,000	768,000	1,024,000	1,024,000	256,000	384,000	384,000	
Max. L7 New Connection Rate	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000	
Reports (PDF)	20	20	40	60	60	20	30	40	
SLAs	100	100	250	250	250	100	100	250	
ARM Objects	20	30	40	50	50	10	20	20	
Policies	1,024	1,024	1,536	2,048	2,048	1,024	1,536	1,536	
						Accelerated Connections	3,000	3,500	4,000
						WAN Optimization (Mbps)	10	20	45
						Max WAN Shaped/QoS (Mbps)	100	500	1000
						Disk Size (GB)	500	500	500
						Data Storage (GB)	385	385	385

About Exinda ®

Exinda is a proven global supplier of WAN Optimization and Traffic Shaping products. The company has helped over 1,500 organizations in 80 countries worldwide to reduce network operating costs and ensure consistent application performance over the WAN. The Exinda Unified Performance Management (UPM) solution encompasses application visibility, control, optimization and intelligent acceleration – all within a single network appliance that is affordable and easy to manage.

North America
+1 877 219 0603
info.americas@exinda.com

EMEA
+44 808 120 1996
info.emea@exinda.com

Asia Pacific
+61 3 9415 8332
info.apac@exinda.com